
# Audi A6 / A7 RMC wiring diagram



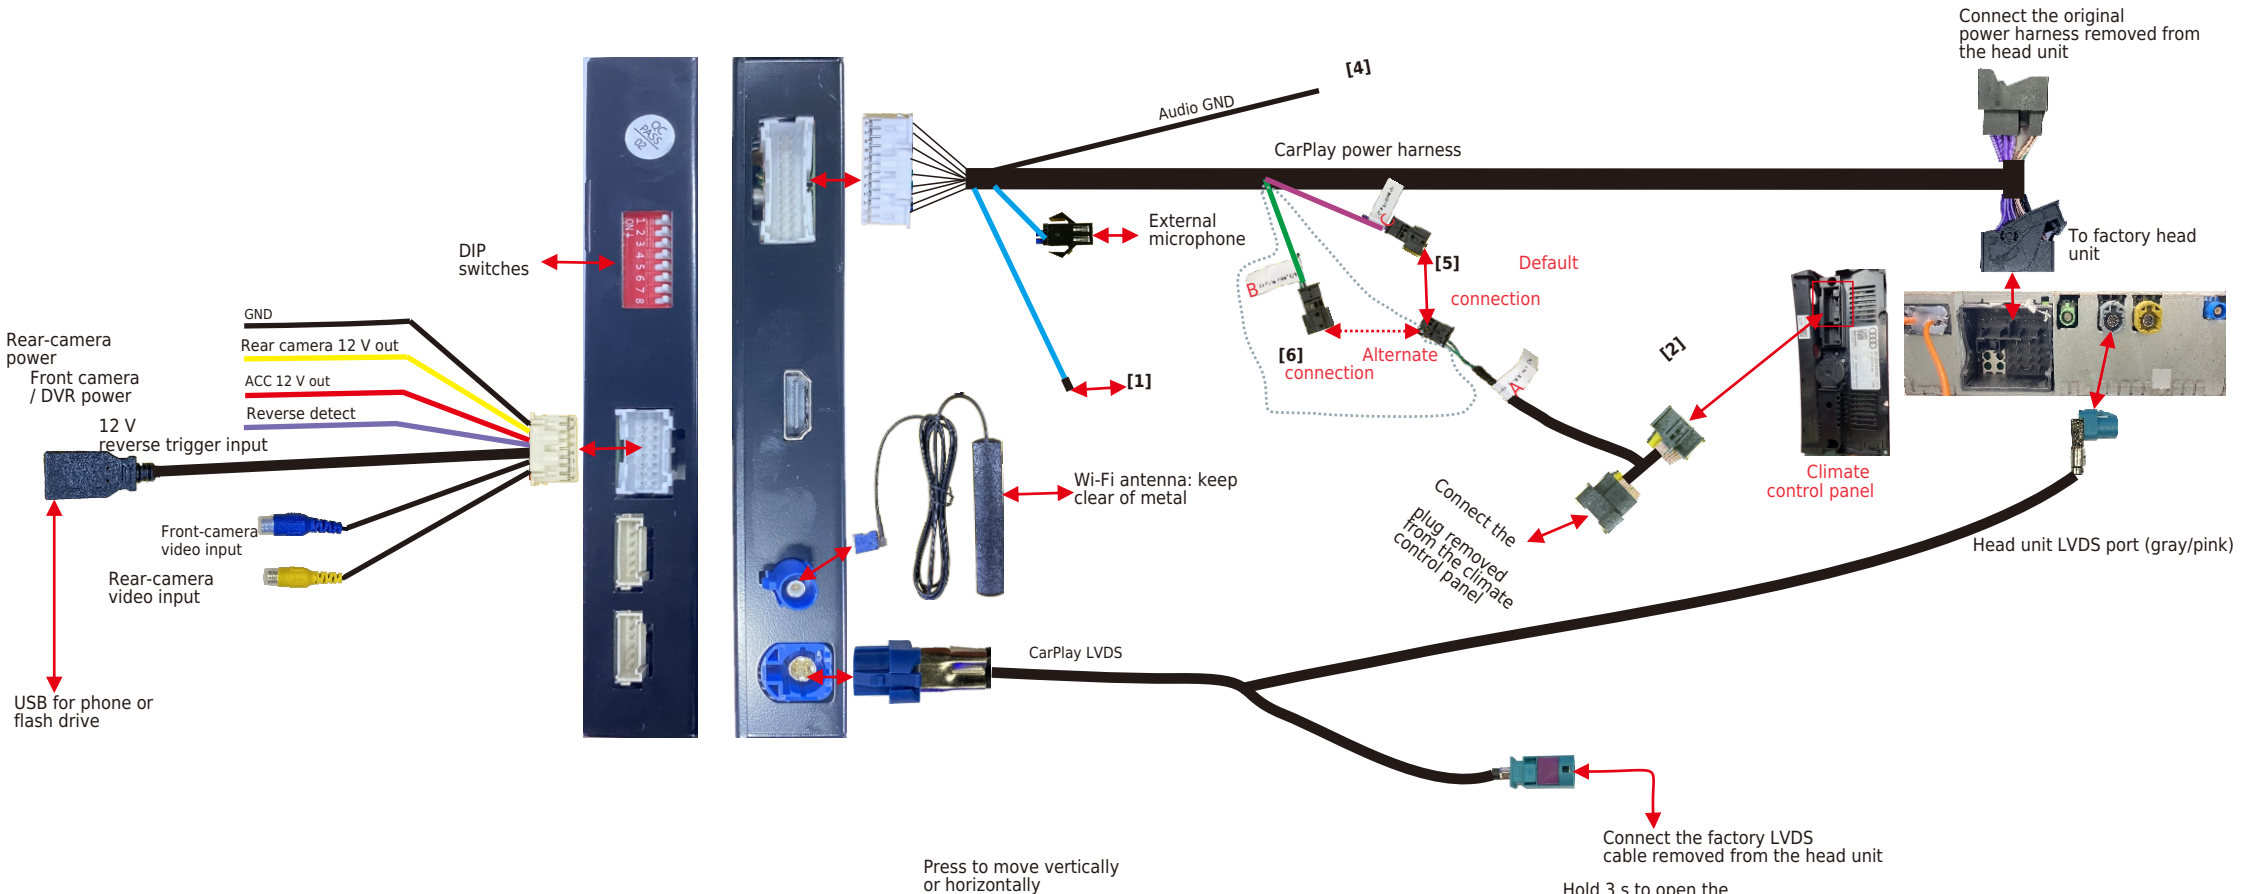


DIP switch settings


High-speed connection

A6/A7 RMC(12-16) A6/A7 RMC(12-16)



Low-speed connection

A6/A7 RMC(12-16)





Setup notes

Unplug the interface power harness before changing DIP switches.

**[3]**

To ignore the PARK button, set switch 7 ON.

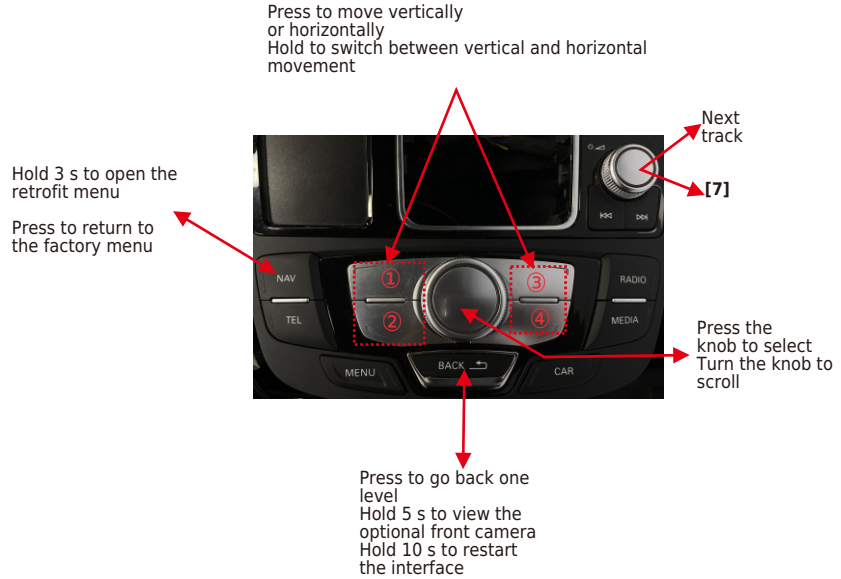

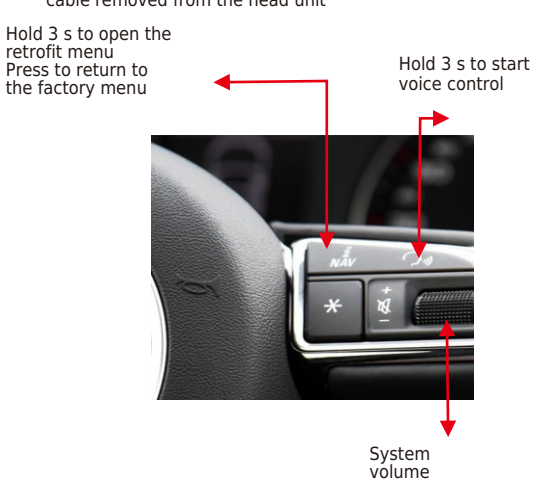
## NUMBERED DIAGRAM NOTES

**[1]** Bluetooth antenna

**[2]** To climate control panel

**[3]** External microphone: switch 8 ON.

**[4]** Leave unplugged

**[5]** High-speed connection

**[6]** Low-speed connection

**[7]** Previous track