



Mercedes-Benz NTG 4.5 wiring diagram

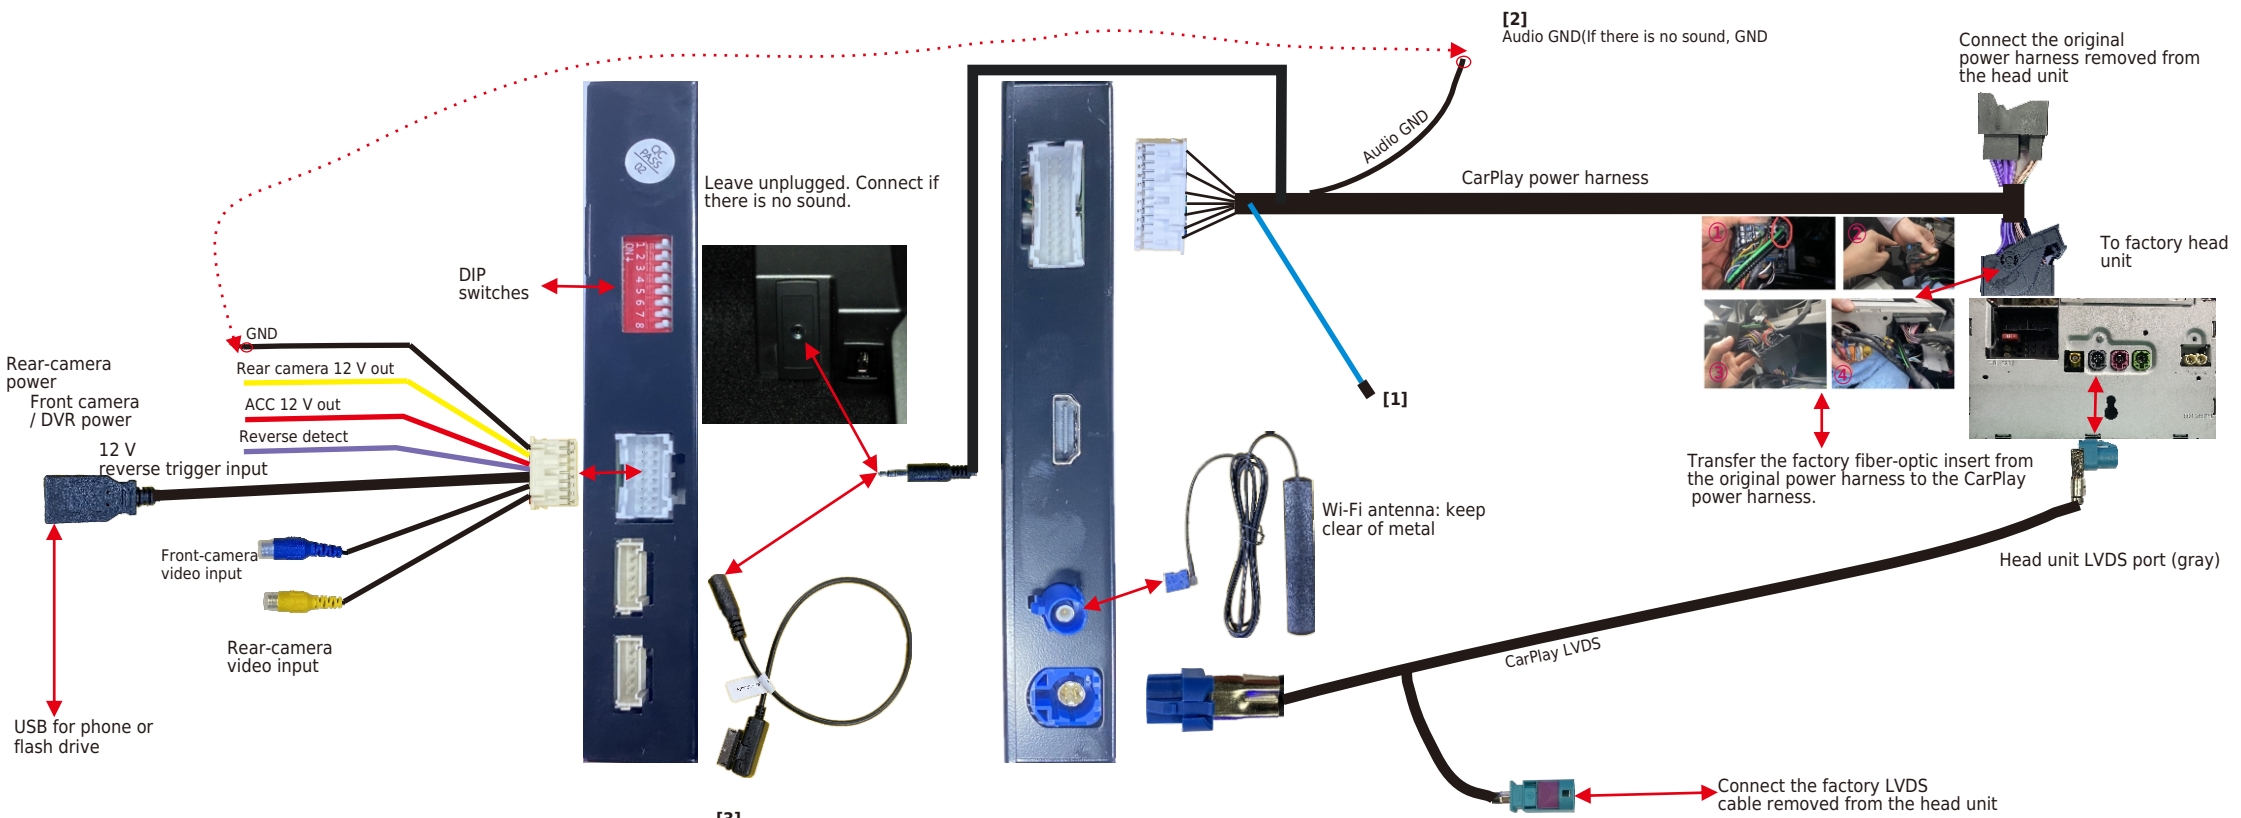

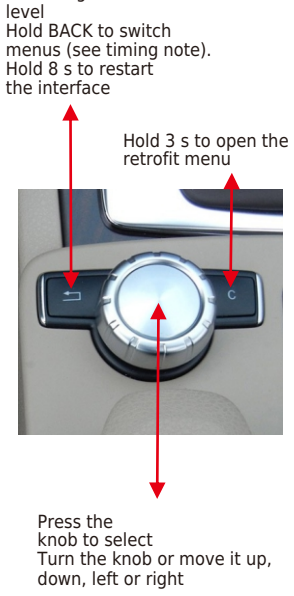

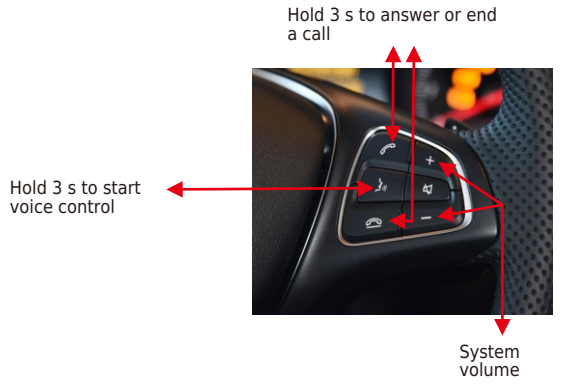

DIP switch settings

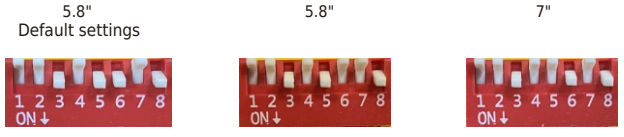

Setup notes
Unplug the interface power harness before changing DIP switches.

NUMBERED DIAGRAM NOTES

[1] Bluetooth antenna

[2] Leave audio ground disconnected. If audio is absent, connect Audio GND to GND as shown.

[3] Connect to the factory AMI port on equipped vehicles

BACK timing: the supplier lists both 3 and 5 seconds for switching menus. Use the separate 3-second menu control shown on this diagram.